



STAINLESS STEEL GLOBE VALVE TO BS5152

FIG. 701



Pressure Rating:
PN10, PN16 and PN25 are available.

Testing Pressure:
1.5 X PN on body.
1.1 X PN on seat.

Connection:
Flange to BS EN1092-1 (BS4504)

Approval:
Hong Kong Waterworks approved
(Ref.: C20050086)

MAINTENANCE FREE

CONSTRUCTION:

1. Yoke Integral with bonnet, integrated durable seat ring, loose disc, rising stem with good flow control bore.
2. Face to Face dimension to BS 5152.
3. Flanged end connection for easy installation.
4. Design and tested according to BS5152
5. Extra corrosion resistance and long service life.

Body and Bonnet

Stainless steel BS 970 Gr.316 (BS EN 10088)

Stem

Stainless steel to BS 970 Gr.316 (BS EN 10088)

Disc and Seat Ring


Stainless steel to BS970 BS 970 Gr.316 (BS EN 10088)

Gasket

PTFE

Bonnet bolt/nut

ASTM 194-B8

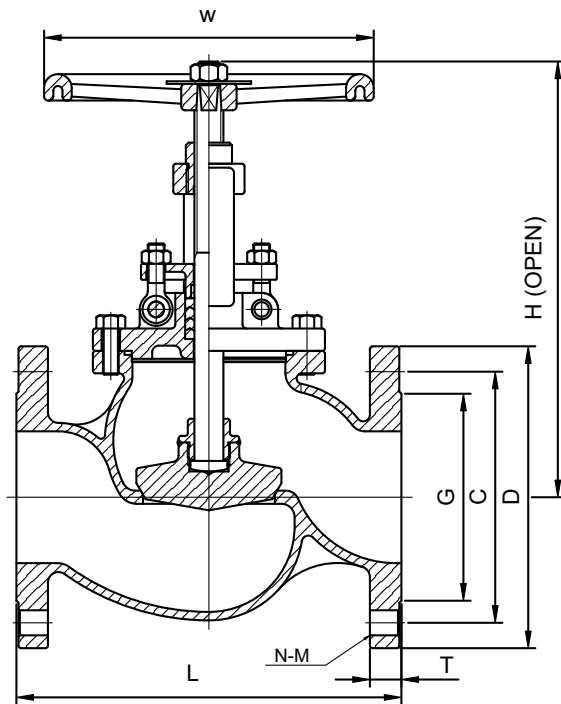

DIMENSIONS:

SIZE		L	H	D	C	G	T
2	50	230	230	165	125	102	18
2½	65	290	243	185	145	122	18
3	80	310	286	200	160	138	20
4	100	350	325	220	180	158	20
5	125	400	380	250	210	188	22
6	150	480	480	285	240	212	22
8	200	600	545	340	295	268	24

* All dimensions in mm.

* Flange end to BS4504 PN25 also available on request.

* Valve comply to BS5160 available.

* Sizes available upto DN300 (12").