



COPPER ALLOY AUTOMATIC AIR VENTING VALVE

Model 3712



PRESSURE RATING:

14 Bar

TESTING PRESSURE:

24 bar.

CONNECTION:

With 1" male x 3/4" female Screwed Ends to ISO7-1 (BS21)



- With testing and self cleaning device protecting the valve seat
- Plastic protection cap prevent damages of the valve seat by atmospheric dust and dirt.
- Long body length and larger air chamber gives much better performance during air exhaustion.

MATERIALS:

Body

Copper Alloy with nickle plated

Cap

Copper Alloy with nickle plated

Float


Non-toxic synthetic resin

Protective Cover

Plastic

CONNECTION SIZE
1" (male) x 3/4" (female)

FLOW CHART

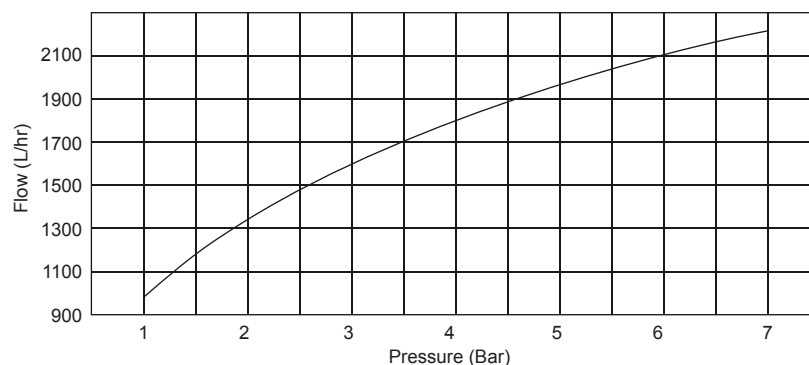

RIGHT IS RESERVED FOR DEVELOPMENT AND IMPROVEMENT IN DESIGN, MATERIALS, AND MANUFACTURING PROCESS.
PIPEMATE INTERNATIONAL LTD.

Copper Alloy Automatic Air Venting Valve

Brand : PSV

WSD Letter Reference No. : NIL

Test Report : PSV Global Limited Test Report